




INTEGRAL TECHNOLOGIES

PA-EQU-31

Equalizer 31 band

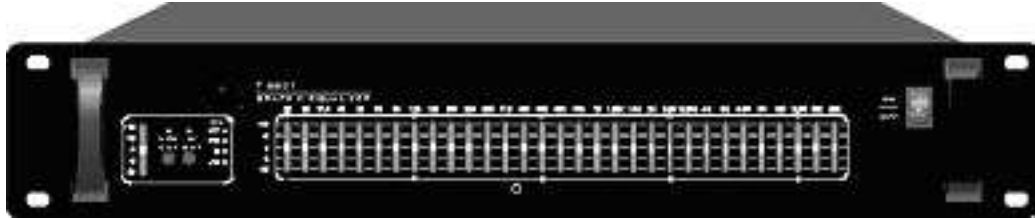

Specifications:

Type:	31 Steps 1/3 Octave, ISO Spacing
Slider Type:	60mm With Positive Center
Control Range:	±6dB or 12dB Selectable
Inputs and Outputs:	XLR, 6.3Ø TRS and RCA Jack
Input/Impedance:	20KΩ (Bal.) 15KΩ (Unbal.)
Output/Impedance:	<600Ω
High Pass Filter:	40Hz (12dB/Oct)
Low Pass Filter:	16KHz (12dB/Oct)
Dimensions:	483W x 200D x 88.8H mm (19" x 7.9" x 3.5")
Weight:	3.2kg (5.76 lb)
Max. Input Level:	+18dBV
THD%:	0.02% at 1KHz, (all slider at center)
Frequency Response:	20Hz to 50KHz -3dB(all slider at center)
S/N Ratio:	>93dB
Power Supply:	100 -120 VAC 50/60Hz or 200 - 240V AC 50/60Hz
Consumption:	15 Watts (Max.)
Max. Output Level:	+16dBV